

F-ESC


CONTROLLED SLIP FILM

F-ESC is a transparent BOPET film. The film is an Untreated "Functional" surface with the other surface being Standard Primer coated or Modified Primer Coated. Specially Modified functional Surface for less COF than F-ESB.

KEY FEATURES:

- Excellent machinability & good handling properties
- Specially modified functional surface is designed to prevent stacked bags from slipping in storage or during palletization
- Primer coating provides excellent adhesion with inks & adhesives
- High clarity

FILM STRUCTURE

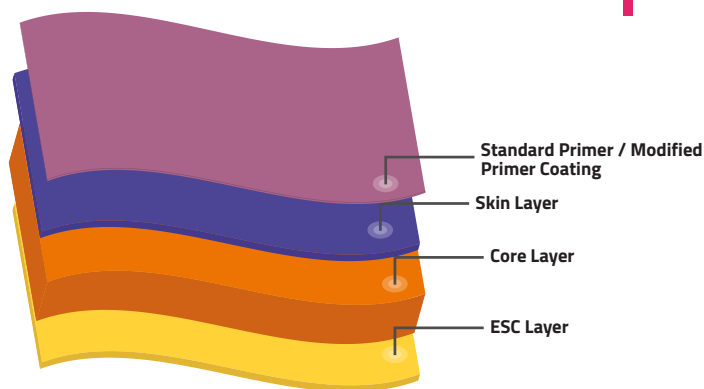

APPLICATION:

- Printing & Lamination
- Bags & Pouches

PROPERTIES		TEST METHOD	UNIT	TYPICAL VALUES	
THICKNESS		Internal	Micron	12	23
			(Gauge)	48	92
YIELD		Internal	m ² / kg	59.52	31.05
			in ² /lb	41934	21876
SURFACE TENSION (min)# (Modified primer coated surface) (Standard primer coated surface)		ASTM D-2578	dyne/cm	52	
				40	
COF (max) (FL (UT) / FL (UT)) "High COF Surface" (AU/AU or AT/AT) (FL/AU or FL/AT)		ASTM D-1894	-	0.60 - 0.80	
				0.30 - 0.45	
				0.30 - 0.45	
HAZE (max)		ASTM D-1003	%	1.5	1.8
TENSILE STRENGTH AT BREAK (min)	MD	ASTM D-882	kg/cm ²	1900	1900
	TD			2000	2000
	MD		(Psi)	27000	27000
	TD			28500	28500
ELONGATION AT BREAK (min)	MD	ASTM D-882	%	105	115
	TD			85	90
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	MD	ASTM D-1204	%	3.0	
	TD			1.0	
MVTR (38°C & 90% RH) (typical)		ASTM F-1249	gm/m ² /day	45	30
			(gm/100 in ² /day)	2.9	2.0
OTR (23°C & 0% RH) (typical)		ASTM D-3985	cc/m ² /day	130	80
			(cc/100 in ² /day)	8.5	5.2

The inherent surface tension of the untreated side of any PET film is a minimum of 42 dyne/cm.

STORAGE & HANDLING

SELEXIBLE needs to be stored in a warehouse below 35°C (95°F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions, SELEXIBLE is suitable for use within 270 days from the date of shipment.

FOOD CONTACT

SELEXIBLE complies with EU and FDA regulations on plastic materials used for food grade applications. Specific documents and SDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Selexible provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Selexible reserves the right to change the technical data sheet at any time without prior notice.

Selexible

Manufacturing Facilities at No. 16
Fengxiang Rd, Wujin District,
Changzhou City, Jiangsu, China

✉ sale@selexible.cn
www.selexibleplastic.com