

R-CHC/R-CHE


CHEMICALLY PRIMED PCR BASED FILM

This film has one surface Chemically Coated with the other surface being either Untreated or Corona Treated. Chemical coating provides excellent adhesion with various inks & adhesives. This Data Sheet applies to all PCR content levels (30, 50, 90, and 100%).

KEY FEATURES:

- Excellent clarity
- Excellent machinability, handling properties, & dimensional stability
- Not suitable for hot fill, sterilization, or pasteurization
- Post consumer recycle content for a low carbon footprint (all % PCR)

FILM STRUCTURE

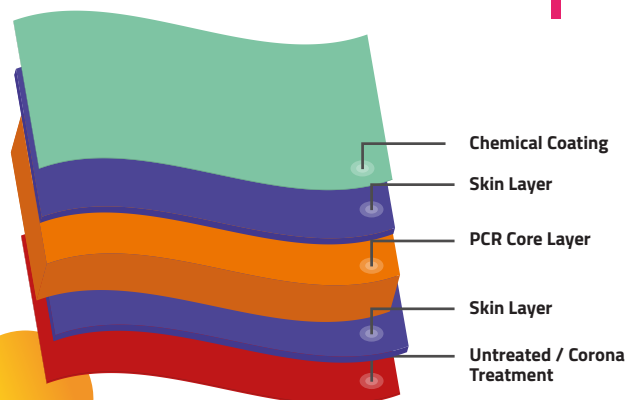

APPLICATION:

- Conversion & Metallization
- Solvent & Water base coating

PROPERTIES		TEST METHOD	UNIT	TYPICAL VALUES							
THICKNESS		Internal	Micron	12	15	19	23	30	36	50	
			(Gauge)	48	60	76	92	120	144	200	
YIELD		Internal	m ² / kg	59.52	47.62	37.59	31.05	23.8	19.84	14.28	
			in ² /lb	41934	33550	26483	21876	16768	13978	10060	
SURFACE TENSION (min) # (Chemical Coated Surface) (Corona Treated Surface)		ASTM D-2578	dyne/cm	60							
				52							
COF (max) Chemical Coated to Untreated Chemical Coated to Corona Treated		ASTM D-1894	-	0.50	0.50	0.50	0.45	0.40	0.40	0.40	
				0.50	0.50	0.50	0.50	0.50	0.50	0.45	
HAZE (max)		ASTM D-1003	%	4.0	4.0	4.5	4.5	5.0	5.0	5.5	
TENSILE STRENGTH AT BREAK (min)	MD	ASTM D-882	kg/cm ²	1900	1900	1900	1900	1900	1750	1750	
	TD			2000	2000	2000	2000	2000	2000	2000	
	MD		(Psi)	27000	27000	27000	27000	27000	25000	25000	
	TD			28500	28500	28500	28500	28500	28500	28500	
ELONGATION AT BREAK (min)	MD	ASTM D-882	%	105	105	110	115	115	120	125	
	TD			85	85	85	90	90	90	95	
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	MD	ASTM D-1204	%	3.0							
	TD			1.0							
MVTR (38°C & 90% RH) (typical)		ASTM F-1249	gm/m ² /day	45	40	35	30	25	20	16	
			(gm/100 in ² /day)	2.9	2.6	2.3	2.0	1.6	1.3	1.0	
OTR (23°C & 0% RH) (typical)		ASTM D-3985	cc/m ² /day	130	110	90	80	75	70	45	
			(cc/100 in ² /day)	8.5	7.1	5.8	5.2	4.8	4.5	2.9	

The inherent surface tension of the Untreated side of any PET film is a minimum of 42 dyne/cm.

STORAGE & HANDLING

SELEXIBLE needs to be stored in a warehouse below 35°C (95°F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions, SELEXIBLE is suitable for use within 270 days from the date of shipment.

FOOD CONTACT

SELEXIBLE complies with EU and FDA regulations on plastic materials used for food grade applications. Specific documents and SDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Selexible provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Selexible reserves the right to change the technical data sheet at any time without prior notice.

Selexible

Manufacturing Facilities at No. 16
 Fengxiang Rd, Wujin District,
 Changzhou City, Jiangsu, China
 ✉ sale@selexible.cn
 www.selexibleplastic.com