

F-UVC


UVC CHEMICAL COATED FILM FOR UV OFFSET SHEET PRINTING

F-UVC is a transparent polyester film. The film is one side UVC chemical coated other side corona treated or Untreated.

KEY FEATURES:

- Good optical properties
- Good machinability & handling properties
- Coated side suitable for UV offset sheet printing

FILM STRUCTURE

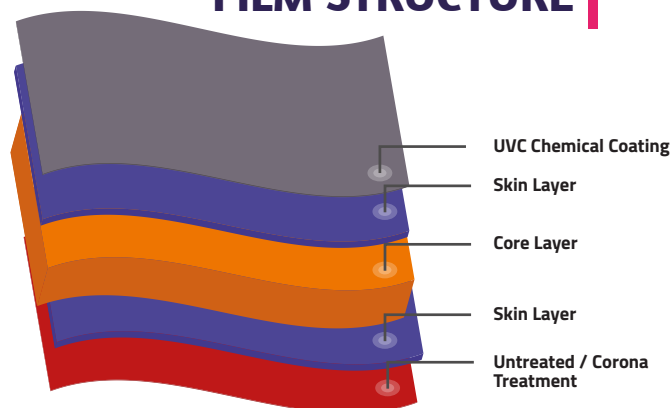

APPLICATION:

- Film is designed for UV off set sheet printing in box lamination

PROPERTIES		TEST METHOD	UNIT	TYPICAL VALUES	
THICKNESS		Internal	Micron	10	12
			(Gauge)	40	48
YIELD		Internal	m ² / kg	71.42	59.52
			in ² /lb	50318	41934
SURFACE TENSION (min) # (UVC Chemical coated Side) (Corona treated Side)		ASTM D-2578	dyne/cm	42	
				52	
COF (max) (One side to the other side)		ASTM D-1894	-	0.55	0.50
HAZE (max)		ASTM D-1003	%	4.0	4.0
TENSILE STRENGTH AT BREAK (min)	MD	ASTM D-882	kg/cm ²	1900	1900
	TD			2000	2000
	MD		(Psi)	27000	27000
	TD			28500	28500
ELONGATION AT BREAK (min)	MD	ASTM D-882	%	100	105
	TD			80	85
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	MD	ASTM D-1204	%	3.0	
	TD			1.0	
W.V.T.R. (38° C & 90% RH) (typical)		ASTM F-1249	gm/m ² /day	50	45
			(gm/100 in ² /day)	3.2	2.9
OTR (23° C & 0% RH) (typical)		ASTM D-3985	cc/m ² /day	155	130
			(cc/100 in ² /day)	10.1	8.5

The inherent surface tension of the untreated side of any Pet film is minimum 42 dyne/cm

STORAGE & HANDLING

SELEXIBLE need to be stored in a warehouse below 35°C (95° F) and should not be exposed to direct sunlight, bright light sources or high humidity. If the material is stored in the recommended conditions, SELEXIBLE is suitable for use within 270 days from date of shipment

FOOD CONTACT

SELEXIBLE complies with EU and FDA regulations on plastic materials used for food grade application. Specific document and SDS are available on request.

DISCLAIMER

It is the responsibility of our customers to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Selexible provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Selexible reserves the right to change the technical data sheet at any time without prior notice.

Selexible

Manufacturing Facilities at No. 16
 Fengxiang Rd, Wujin District,
 Changzhou City, Jiangsu, China
 ✉ sale@selexible.cn
 www.selexibleplastic.com